


Instrument overview	14
Keyboard	14
Operating philosophy	15
Run mode (normal operating mode)	15
Setting mode (for adjustments)	15
Option mode	16
Commissioning	16
The altimeter	16
General remarks	16
How does an altimeter work?	16
Altimeter 1 (ALT 1)	17
Altimeter 1 setting mode	17
Altimeter 1 option mode	17
Altimeter 2 (ALT 2)	18
Altimeter 2 setting mode	18
Altimeter 2 option mode	18
Vario	19
Vario sound levels	19
Analog vario bar display	19
Digital vario display (Integrator)	19
Vario setting mode	19
Vario option mode	20
Descent tone/Descent alarm	20
Descent alarm setting mode	20
Time measurement and temperature display	21
Clock time (real-time clock)	21
Stopwatch (CHRONO)	21
Flying time	21
Temperature display	21
Time measurement and temperature display setting mode	21
Time measurement and temperature display option mode	22
Log book	22
General remarks	22
Logbook setting mode	22
APPENDIX	23
Scope of supply	23
Water damage	23
Function overview	47

Instrument overview





1. On/Off switch
2. Analog vario bar display
3. Digital vario display
4. INDICATOR display
5. TIME / SPEED / MEMO display
6. Altimeter & stopwatch display
7. Keyboard

Keyboard



- 1 START-STOP-RESET
- 2 Variosound/Attenuation
- 3 ALT1-ALT2-CHRONO
- 4 CLEAR ALT 2
- 5 Descent tone/alarm
- 6 TIME / SPEED / MEMO

Operating philosophy

The philosophy behind all Bräuniger instruments is to keep everything as simple as possible. This is why each key has only one function, i.e. a function can be displayed and switched on or off with each key. In order to alter a function, you press and hold down the relevant function key. The setting to be changed will then flash and can be altered by pressing  and .


The instrument has three operating modes: normal operating mode, setting mode and configuration mode.

Run mode (normal operating mode)

The instrument is in run mode when used in normal operation. In run mode, the instrument will display your altitude, ascent and the time continuously.

Setting mode (for adjustments)

In setting mode, the most important value can be changed for each display. For example, the altitude can be set by using the setting mode for altimeter 1.

Enter setting mode for a particular display (e.g. for altimeter 1), by pressing the relevant function key (e.g. ) and holding it down for about 4 seconds. As soon as you are in setting mode, the SET indicator will appear in the INDICATOR display. The value to be changed begins to flash.


In order to return to run mode, press the relevant function key briefly (e.g. )

If no change is made in setting mode for 15 seconds, the instrument returns to run mode.

Option mode (configuration mode)

Option mode allows you to configure the instrument to your requirements and preferences. In option mode, you can set the parameters for the relevant display or function at various levels. For example, these can be units or special functions. A precise description of the various settings in option mode is given in the descriptions of the individual functions.

You can enter option mode (in the setting mode of a function) by simultaneously pressing the two keys marked "Option" in yellow (Fig. 1). If the instrument is in option mode, this is confirmed by the OPTION indicator in the INDICATOR display.

In OPTION mode you can change several parameters. By briefly pressing the relevant function key (e.g. ) you skip from one level to the next. In each level you can change one parameter of the relevant function. The level number will appear each time in the digital vario display.

If no change is made for 15 seconds in option mode, the instrument returns to run mode.

In order to return to run mode manually, press the two option keys simultaneously again (Fig. 1).




Figure 1

Commissioning

Switch on the instrument with the On/Off switch. On being switched on, the instrument goes through a self-test routine and then enters run mode.

When switched on, the instrument settings correspond to those valid when the instrument was last switched off.

When first switched on, the instrument displays the approximate charging status of the batteries in the vario bar display. If the display shows approximately 50% of the maximum display in the green sector, the batteries are still half full. If the display is in the red sector, the batteries must be changed. If the batteries are low on charge during a flight, PO will light up briefly in the digital vario display and, at the same time, the charging status of the batteries is shown in the bar display.

The battery life of the instrument using alkaline batteries is 160 hours. Rechargeable batteries can also be used. However, operating time is substantially shorter with these (total operating time is approximately 40 - 50 hours).

Alkaline batteries can also be recharged several times using the appropriate charging unit (no fast chargers!).

The altimeter

General remarks

How does an altimeter work?

An altimeter is really a barometer because it does not measure altitude directly but pressure. The altitude is then calculated from the pressure. For the purpose of calculating absolute altitude (according to the international formula for altitude), the pressure at sea-level is assumed as being zero-point pressure.

Why does pressure change with altitude? The air pressure at a point on Earth is produced by the weight of the atmospheric air above it. This is why air pressure decreases with altitude - there is less air above your head! At 500 meters above sea-level, a pressure change of 1 mbar corresponds to a difference in altitude of about 8 meters.


In practice, however, it is not quite that simple as other factors also have an influence on air pressure. Pressure also depends on temperature and, of course, weather. On a stable day, there can be air pressure fluctuations of 1 mbar caused by temperatures and this corresponds to a difference in altitude of ± 10 meters. Depending on the weather, air pressure at sea-level (QNH) can be between 950 mbar and 1050 mbar. In order to eliminate this weather effect, an altimeter needs continual recalibration. This means that the altimeter must be set at a known altitude to display that same altitude.

When the weather changes fast (e.g. cold fronts), air pressure can change in the course of a day by up to 5 mbar. This represents a change in altitude of 40 meters!

Another method of calibrating an altimeter is by entering the current QNH. What is the QNH? In flying circles, a general zero point is needed to enable all aircraft at the same altitude to also have the same altitude on their altimeters. This joint basis is called the QNH. The QNH is the current air pressure in hPa (1 hPa = 1 mbar) calculated at sea-level. It is redetermined several times daily and can be obtained in the flying weather report or from airfields by radio.



Altimeter 1 (ALT 1)



Altimeter 1 displays absolute altitude, i.e. the altitude above sea-level.

Function key  is used to change from the displays for altimeter 1, altimeter 2 and the stopwatch. Pressing and holding down this key will make the instrument go into setting mode.

Altimeter 1 setting mode

As mentioned above, the absolute altitude can be set in setting mode. The altitude and the QNH flash on 2 lines. Using the setting keys

 and , you can set the altitude and the QNH simultaneously. If you do not know what altitude you are currently at, you can set the altitude using the QNH but this method is not as precise as direct altitude setting. The QNH has a resolution of 1 mbar which corresponds to an altitude resolution of approximately 8 meters. The altitude, however, can be set directly to an accuracy of 1 meter.

Pressing the setting keys  and  simultaneously will take you from setting mode to option mode.


Altimeter 1 option mode

In option mode, you can set the **unit for ALT 1** (meters or feet) at the first level and, at the second level, you can set the **unit for the QNH** (hPa or inHg). The indicator for the relevant unit set flashes in the display.

The pressure sensor can be corrected at the third level (± 50 hPa).

If you find that the QNH value displayed at a known altitude deviates seriously from the QNH value of a weather station in your area, you can correct this deviation by entering the deviation (with a different prefix). I.e. if the QNH displayed by your instrument is 20 hPa too high, enter -20 to correct this deviation.

This deviation is caused by the aging of the pressure sensor and stabilizes after 2 - 3 years.

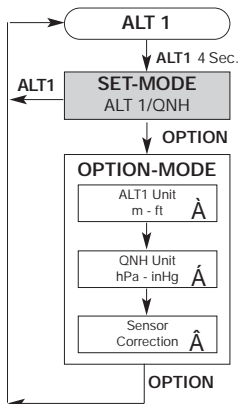



N. B.: Incorrect manipulation of the correction value of the pressure sensor will result in false altitude readings! Never alter the basic settings of the altimeter unless you have good reason to do so (in your own interest)!

In option mode, the indicators OPTION and ALT 1 appear and the relevant number of the module is shown at the top of the display. The unit to be adjusted will flash.

Altimeter 2 (ALT 2)

Altimeter 2 can either be used as an absolute altimeter or as a relative altimeter.

When used as an absolute altimeter, it functions in precisely the same way as altimeter 1. Altimeter 2 can now, for example, display the altitude in feet and altimeter 1 the altitude in meters.



The relative altimeter displays the current altitude with reference to a point. This reference point can be set at zero in run mode at any time by using the  key or set at any altitude in setting mode. The relative altimeter can thus be used to measure the higher altitude of the take-off area. Pressing the  key at the take-off area will zero ALT 2 for this purpose.


Altimeter 2 setting mode

The altitude can be set in setting mode in precisely the same way as with altimeter 1.


If altimeter 2 is selected as the absolute altimeter, it is coupled to altimeter 1. Any change in the display for altimeter 1 is reflected by a corresponding change in the display for altimeter 2 and vice-versa.

Altimeter 2 option mode

In option mode, you can select the unit (meters or feet) at the first level as with altimeter 1. The unit selected flashes in the display. You can toggle between units by pressing either the  key or the  key.



Press key  to enter the second level of option mode. At this level, you select the operating mode of altimeter 2. If this is set at absolute altimeter, the two indicators ALT 1 and ALT 2 will flash in the display. If set at relative altimeter, only the indicator ALT 2 will flash.

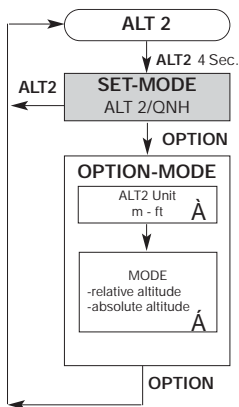You return from option mode to run mode by waiting 15 seconds or again pressing the two keys marked "OPTION" simultaneously.



Vario


Vario sound levels

Two sound levels can be set or the sound system switched off completely by repeatedly pressing the  key. While the  key is pressed, a tone will sound at the desired level.

Analog vario bar display

The vario bar display has a range of ± 8 m/s in two scale passes. The scale unit always corresponds to 0.2 m/s. Up to 4 m/s, the bar display fills. If it displays more than 4 m/s (ascent), the ascent is displayed inverted, i.e. the display is full at 4 m/s and empties from below when ascent increases.

E.g.:



The sensitivity of the bar display corresponds to the basic attenuation of the vario (\ddagger setting mode of the vario). It therefore always displays current ascent.

Digital vario display (Integrator)

The digital vario displays the attenuated climb rate for the last X seconds in second rate. The time X, via which ascent is attenuated (integration time), can be changed at the first level of option mode. These values appear flashing in the digital vario display.

You can enter the vario's setting mode by pressing the  key for a long time (approximately 4 seconds).



Vario setting mode

The basic attenuation of the vario can be altered in setting mode. The basic attenuation of the vario is effective on all vario functions; it can be set to 0.5 sec, 1 sec or 1.5 sec.


N.B.: The fastest vario is not always the best vario. In very rough and severe conditions, it is advisable to attenuate the vario more. Turbulences are then filtered out by the attenuation and not displayed.


You can enter option mode by simultaneously pressing the two option keys.

Vario option mode


The integration time of the digital vario can be altered at the first level of option mode. The values are in 5-second steps between 5 and 35 seconds and appear flashing in the digital vario display. At setting 1, the digital vario is displayed without averaging and then runs parallel to the bar display. The values can be altered with the  and the  keys.

The audio response point can be adjusted at the second level. The audio response point can be adjusted from +2 cm/s to +40 cm/s. The current response point appears in the bar display and represents one tenth of the value displayed. E.g.: a display of 2 m/s corresponds to an audio response point of 20 cm/s.

The digital vario unit can be selected at the third level: m/s or feet/min x 100. The current setting flashes in the digital vario display. You can switch between the two units with the  key.

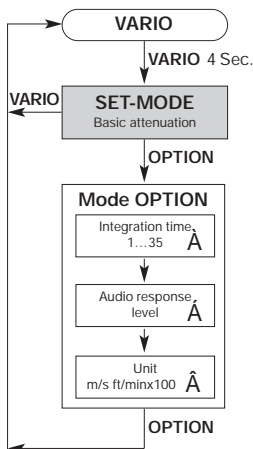


Descent tone/Descent alarm

The descent tone is a continuous tone dependent on descent which sounds as soon as descent is greater than the response point. The descent tone can be set or switched off with the  key. When the descent tone is active, the SINK indicator is displayed. When the descent tone is first switched on, a mark appears in the bar display indicating the response point set.


Descent alarm setting mode

The response point of the descent alarm is set in the bar display using the keys. The response point can be set over the entire range of the display and also remains stored in memory after the instrument has been switched off.







Time measurement and temperature display


Clock time (real-time clock)

In the lower display, the  key is used to toggle between, time and MEMO display. The time, the date and the year can be set in setting mode.

Stopwatch (CHRONO)

The stopwatch is displayed in the upper display. It can be started and stopped with the  key. If the stopwatch has been started, the indicator CHRONO will flash. Press key  to toggle between ALT 1, ALT 2 and CHRONO in the upper display. Press key  again to stop and start the stopwatch again. In order to reset a halted stopwatch, press the  key for 4 seconds. If the stopwatch has been halted, the CHRONO indicator remains displayed until the stopwatch has been reset.

Flying time





The flying time clock is automatically started after the instrument has been switched on and runs in the background independently of the stopwatch. The flying time is saved when the instrument is switched off. The flying time saved in memory is kept in the flight log. During flight, the flying time can be invoked in the MEMO display ( Logbook).


Temperature display

The temperature display is an additional function of the time display. The temperature display can be switched on or off. If the temperature display is switched on, the temperature is briefly shown every 30 seconds in the time display (the time interval can be set using the PC setup). The temperature display is switched on or off in option mode.

Please note: The temperature display reacts to changes in temperature with a slight delay as the temperature sensor is inside the instrument.



Time measurement and temperature display setting mode

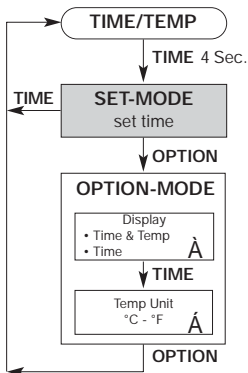The  key and the  key are used in setting mode to set the time. The hours and minutes are set first and confirmed with the  key. The date can now be entered in precisely the same way. This input is again confirmed with the  key. The year is also entered and confirmed in the same way.




Time measurement and temperature display option mode

The temperature display can be switched on or off at the first level of option mode. If it is switched on, the TEMP indicator will flash as well as a TIME indicator. When the temperature display is switched off, only the TIME indicator is on.

The unit of the temperature display (° Celsius or ° Fahrenheit) can be selected at the second level using the  key and the  key.



Logbook

General remarks

The maximum values of the current flight and those of the previous 19 flights are saved in memory and can be invoked in the MEMO display. You can access the MEMO display by repeatedly pressing the  key until the MEMO indicator appears.


The maximum values saved are:


- Maximum absolute altitude ALT 1
- Maximum relative altitude ALT 2
- Maximum ascent and descent VARIO bar display
- Flying time CHRONO
- Date Lower display

The  key and the  key are used to display the flight required; flight 0 is the current flight, the peak values of which are continuously updated. Flight 19 is the least recent flight and is deleted whenever a new flight is saved to memory.

A flight is saved to memory automatically when the instrument is switched off. (Condition: the instrument has been switched on for at least 3 minutes and a difference in altitude of at least 50 meters has been attained.)

Logbook setting mode

All flights in the logbook can be deleted in setting mode. CI appears in the MEMO display. The logbook memory is deleted by pressing the  key for 4 seconds. As soon as the memory has been deleted, all the segments of the display will flash briefly and the instrument starts up again.



APPENDIX

Scope of supply

The following items are included:

- AV Pilot II instrument
- Leg clip
- Protective sleeve
- Manual

The following are available as accessories:

- Various attachment fixtures

Water damage

If the instrument is damaged by water, remove the batteries at once. In the case of salt water, rinse the instrument thoroughly with handwarm fresh water. Then leave the instrument to dry out and send it as soon as possible to your Bräuniger dealer or to Bräuniger itself for checking.

Warning: Never try to dry it out in a microwave oven!

If the instrument fails to operate correctly, remove the batteries from the instrument for 5 minutes. After the batteries have been replaced the instrument will carry out a self - test. If the problem persists, please return the instrument together with a description of the problem to your Bräuniger dealer or to Bräuniger directly.

